

EXPERIMENTAL ANALYSIS THE DEFLECTION OF TALL BUILDING CORES – STIFFENED BY FLOOR SLABS - USING PLEXIGLAS MODEL

Đerđ Varju¹
Aleksandar Prokić²
Miroslav Bešević³

UDK: 624.042:69.032.22

DOI: 10.14415/konferencijaGFS2019.031

Summary: This paper presents the procedure for the experimental determination of the horizontal deflection of a point on the model made of Plexiglas due to horizontal force effects. The model's geometry is proportional to the geometry of the numerical examples which applied in works of several authors for the analysis of the tall building cores. This examination offers the experimental analysis possibility of the reinforced-concrete core - stiffened by floor slabs at each floor level - on effects of the horizontal load of seismic forces and the wind. These results are compared with the results obtained by FEM showing significant agreement.

Keywords: experimental model, tall building core, thin-walled beam, torsion

1. INTRODUCTION

In the case of tall buildings, the influence of transverse loading caused by winds or seismic activity can be significant. This load is most often supported by a reinforced concrete core, which houses the elevator shaft or the staircase of the building. Due to the small thickness of the core walls compared to the dimensions of the cross section, which, again, are small compared to the height of the building, according to the Vlasov theory, the core can be treated as a thin-walled, open cross section cantilever beam. Floors act as transverse stiffeners providing the necessary cross section rigidity of the core. The core foundation is usually stiff enough, so full restraint can be assumed.

If the shear centre of the core cross section is located asymmetrically in respect to the base of the building, or if the transverse loading is eccentric, the core is, apart from bending, exposed to torsion, as well. In the case of taller buildings the torsion influences are greater, so it is necessary to provide appropriate torsional rigidity to the core. Floor slabs connecting the core walls at each floor level also contribute to torsional rigidity.

¹ dr Đerđ Varju, dipl.inž. građ., Univerzitet u Novom Sadu, Građevinski fakultet Subotica, Kozaračka 2a, Subotica, Srbija, tel: 024 554 300, e-mail: varjugy@gf.uns.ac.rs.

² dr Aleksandar Prokić, dipl.inž. građ., Univerzitet u Novom Sadu, Građevinski fakultet Subotica, Kozaračka 2a, Subotica, Srbija, tel: 024 554 300, e-mail: aprokic@eunet.rs.

³ dr Miroslav Bešević, dipl.inž. građ., Univerzitet u Novom Sadu, Građevinski fakultet Subotica, Kozaračka 2a, Subotica, Srbija, tel: 024 554 300, e-mail: miroslav.besevic@gmail.com.

The influence of these elements on the total torsional rigidity of the core can be significant.

The reliability and applicability of the new methods for the tall building cores analysis is usually tested by comparison with other, already known methods that are available in the literature and/or with FEM results. Unfortunately, there is a lack of data compared with experimental results in most of the cases, especially concerning the core with open cross-section. One approach to check reliability of the calculation method is the application of such a method on an experimental model. In order to prove the validity of his calculation method, Ambrosini, tested thin-walled beams made of aluminium, as described in the works [1] and [2]. The results of Ambrosini's calculations were compared with the results of the experiment and FEM. Wu Qian, Fang and Yan [3] made their experimental models using Plexiglas.

Regarding comparison as a method, it is preferable to select such a parameter that could equally be determined by calculation as well as by experiment. Such parameter could be, for example, the horizontal deflection on certain spots of a model. It is well-known that horizontal deflection in high buildings is particularly important data. Its maximum value that usually appears on the upper part of a building must always be determined and limited (Zalka [4] and [5]).

The experimental model that will be applied in order to analyse the aforementioned core is made of Plexiglas. The model's geometry is approximately proportional to the numeric example used in numerous scientific papers. The testing results will be compared with the results obtained by the SAP2000 application.

2. EXPERIMENTAL MODEL

The experimental model in this paper had already been analysed before, in order to check the accuracy of the numeric method for the determination of the dynamic characteristics of the tall building core ([6], [7] and [8]). Figure 1 illustrates the outline and geometric data of the model.

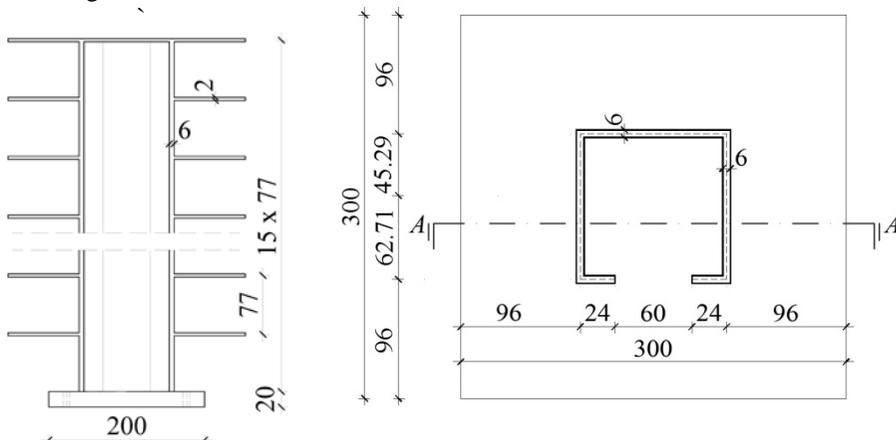


Figure 1. Cross section A-A and base plot of the experimental model

It is made of Plexiglas (PLEXIGLAS XT) sheets with a thickness of 2mm, 6mm and 10mm. The lower part of the model was bonded with two mutually glued Plexiglas panels of 10mm thickness. It was connected with four screws M8 to a steel panel 5mm thick. The steel panel was fastened to a immobile base by 4 screws M8. A wooden mould and special glue ACRIFIX®109 was used to shape the model. Figure 2 illustrates details of the model manufacturing.



Figure 2. Details of the mould

There is a similarity between the numeric example and the Plexiglas model by element dimensions according to Table 1.

Table 1. The example elements and Plexiglas model geometric data

Geometric characteristics of elements	Example	Model	Ratio
	[mm]	[mm]	
Wall thickness of the core	305	6	1:50.833
Thickness of floor slabs	100	2	1:50.000
Dimensions of floor slabs	15240/15240	300/300	1:50.800
Cross section dimensions of the core	5791/5791	114/114	1:50.798
Width of the opening	3048	60	1:50.800
Height of a storey	3810	77	1:49.481
Total height of the building	57150	1155	1:49.481

The authors took into account that the Plexiglas sheets had been manufactured only with certain thicknesses, thus it was not possible to achieve full geometric similarity between the model and the numeric example. Mutual relations of dimension values in the model justify the intention to treat the core as a thin-walled beam with open cross section which is compacted at the bottom into the foundation panel while it is free at the top.

3. EXPERIMENTAL ANALYSIS

The purpose of the experimental analysis is to define the horizontal deflection of certain points in the experimental model due to the effects of the known horizontal force by accurate measurements. The horizontal force in the model is applied by a thin nylon string and roller. One end of the nylon string is fixed at the hole (with a diameter of 6 mm) that was drilled in the model. The other end of the nylon string is loaded by the known weight force (Figure 3).

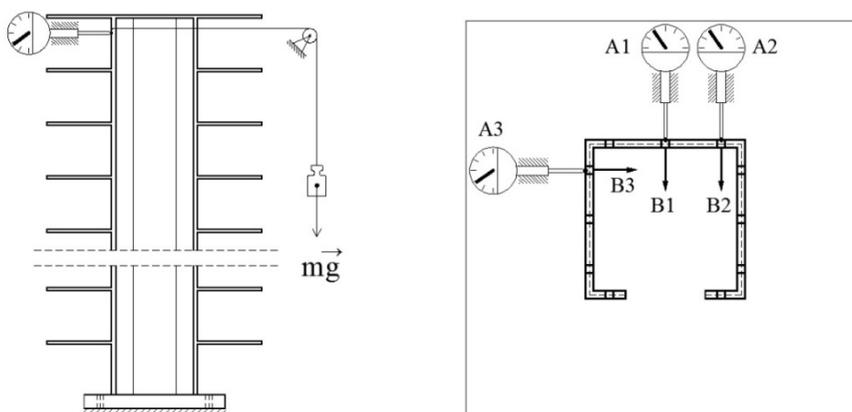


Figure 3. Position of comparators and the direction of loadings

Horizontal moving Δu was measured by the comparator with accuracy 0.001mm. In order to fit the comparator, the authors used a magnetic holder with a mechanism (Figure 4). The model and the measuring devices were installed in the steel testing frame at the **Laboratory for Structures and Materials** at the facilities of the Faculty of Civil Engineering in Subotica, Serbia [9]. The weight force that has loaded the model was defined by the mass of the scale weight m . The points in which the deflection was measured (A1, A2 and A3) were selected in order to overlap the node points of the model in the FEM analysis. The aim of selecting the holes (i.e. places to enter the force) was to expose the model to bending (load in B1), as well as to a combination of bending and torsion (load in B2 and B3).

In the course of the experimental analysis the intensity of forces was gradually increased. After each increase, a certain time period was needed to stabilize the value at the display on the comparator. It was thus seen that the greater the load intensity increase, the greater the time period necessary for stabilization. Over a certain load value the model deflection could not be stabilized any further, i.e. the plastic deformation of the Plexiglas occurred. Based on the above-mentioned, it is necessary to determine the upper limit of the load intensity up to which the model behaves flexibly. The authors conducted testing in all measurement points A1, A2 and A3 with the load B1, B2 and B3, aiming to establish the largest force value. This testing first resulted in plastic deformation in the measurement point A3, given B3 load. The force intensity was complemented with the weight force of the scale weight mass $m=1350g$. Further analysis of the model occurred only in this so-called flexible zone.

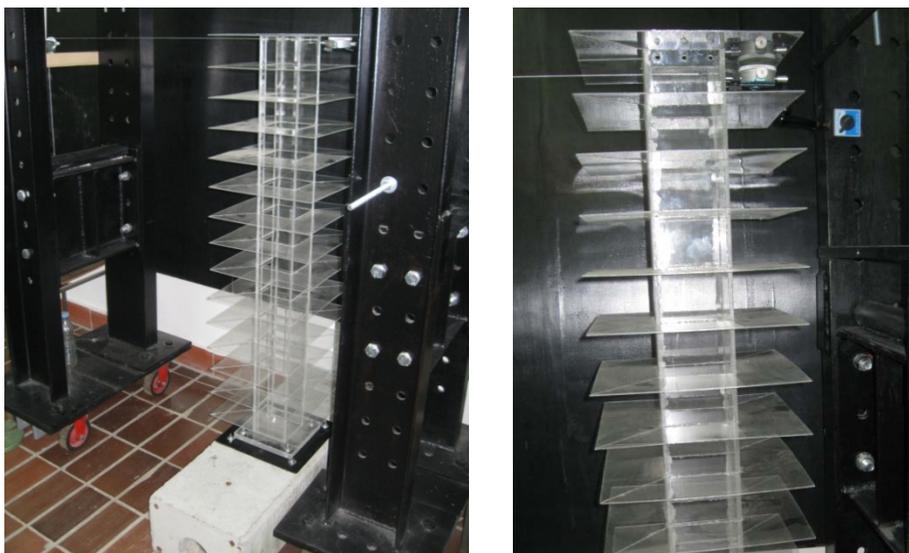


Figure 4. The experimental model and measuring device

4. FEM ANALYSIS

The experimental model with analysis including SAP2000 application was shaped with 2120 nodes and 1660 Four-node Quadrilateral Shell elements. The nodes at the foundation panel level were fully restrained. The testing for the Young modulus took place at the same location, at the **Laboratory for Structures and Materials** of the Faculty of Civil Engineering in Subotica. The Young modulus was determined experimentally $E=3000 \cdot 10^3 \text{N/mm}^2$. The shear modulus was taken over from the Evonik manufacturer website and equals $G=1095 \cdot 10^3 \text{N/mm}^2$.

In order to ensure comparability, the calculation used the same force intensities as were used in the measurements. The deformed shape of the model obtained by the SAP2000 application is presented in the Figures 5-7.

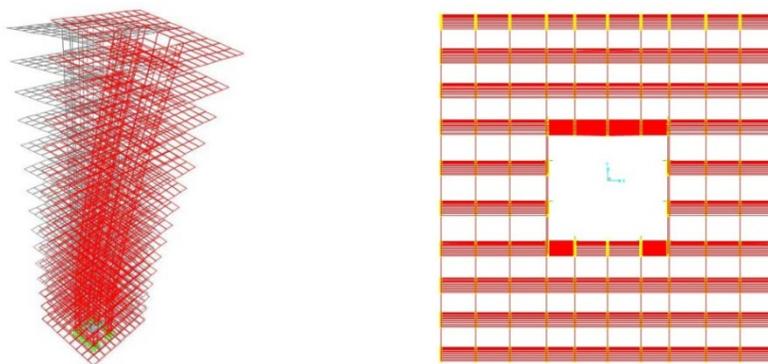


Figure 5. Deformed shape of the model with the load in B1

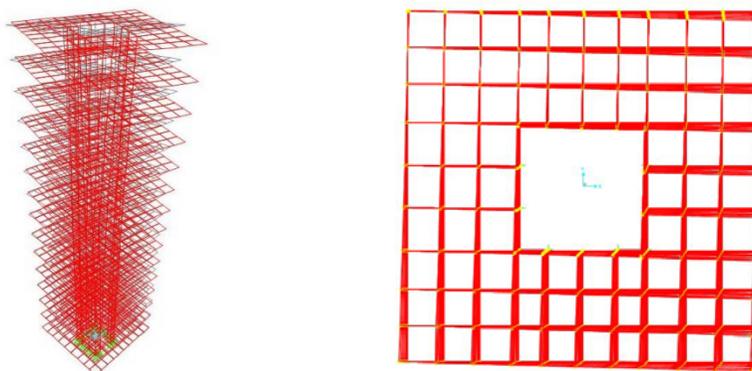


Figure 6. Deformed shape of the model with the load in B2

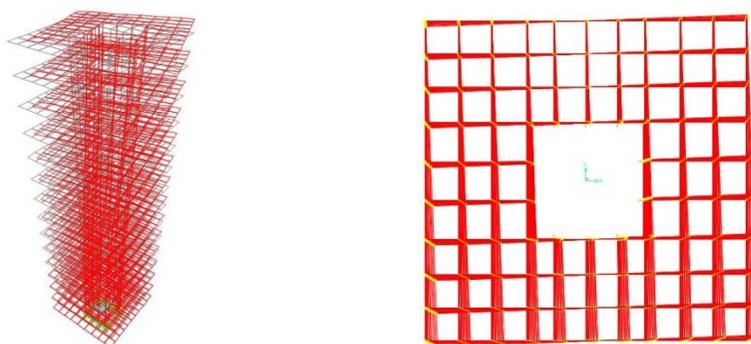


Figure 7. Deformed shape of the model with the load in B3

When the model was subjected to the B1 load the model was exposed to bending only. With the loads B2 and B3, in addition to bending, the model was exposed to torsion, too.

5. CALCULATION AND MEASUREMENT RESULTS ANALYSIS

Table 2 presents the numerical values of the horizontal deflection in the model points (A1, A2 and A3) obtained by the experiment and SAP2000 application, as well as their comparison. The weight force used to load the model is defined by the scale weight mass m and varies in the range: $m=250\div 1250\text{g}$ with steps $\Delta m=250\text{g}$.

The values of the horizontal deflection of the model points show significant agreement between calculation results obtained by the SAP2000 application and the measurements. It was noticed that with increase of the intensity of forces, the relative difference in each measuring point increased, as well as. At the measuring point A3 this increase was more prominent than by two others.

The data outlined in Table 2 is given in graphical form Figure 8. The lines obtained by the SAP2000 application are marked with S , while those obtained by the measurements are marked with M . The measurement points are labelled as Numbers 1, 2 and 3.

Table 2. Analysis of the experimental model results

Measured point / loading	Weight mass	Experiment	SAP2000	Difference
	[g]	[microns]	[microns]	[%]
A1 / B1	250	111	107	3.74
	500	222	213	4.23
	750	334	320	4.38
	1000	447	427	4.92
	1250	561	533	5.25
A2 / B2	250	141	135	4.44
	500	284	270	5.19
	750	428	404	5.94
	1000	575	539	6.67
	1250	724	674	7.42
A3 / B3	250	204	195	4.62
	500	412	390	5.64
	750	629	586	7.34
	1000	852	781	9.09
	1250	1098	976	12.50

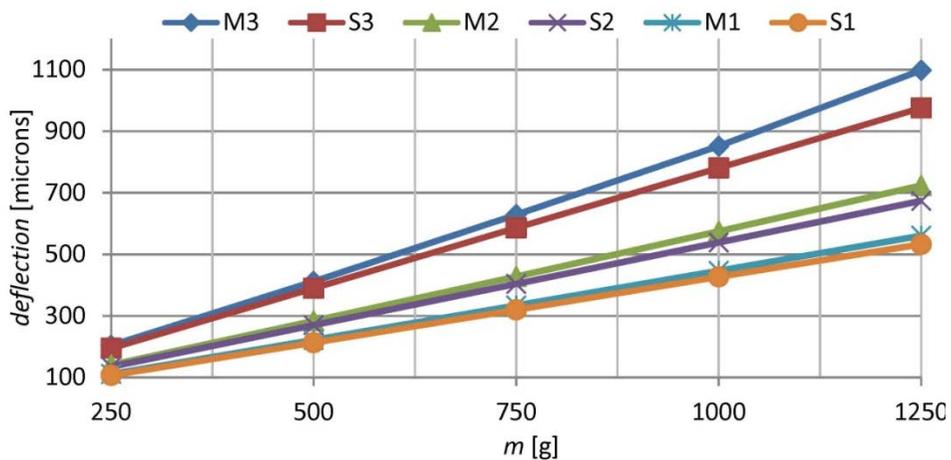


Figure 6. Change of deflection values of the model points A1, A2 and A3

6. CONCLUSION

This paper offers a description of the procedure for the horizontal deflection points of the Plexiglas model by the experiment with the horizontal force effect. The model is described and details about the experiment are provided. The authors especially focused their attention on the determination of the largest force value in which the model still behaves flexibly. Further, an analysis was conducted with the SAP2000 application and the outcomes presented. The authors state that the results of the experiment and the calculation are thoroughly consistent.

On the basis of the above-described analysis the following conclusion can be drawn:

- Tall buildings core stiffened by floor slabs at each floor level considered in this paper can be modelled with sufficient accuracy with reduced Plexiglas models given the horizontal deflection analysis initiated by the horizontal force effect. However, special attention ought to be paid to the load intensity, which is to stay within the limits where the model behaves flexibly.
- The presented procedure enables the user to prove the reliability and applicability of the new methods for the horizontal deflection calculation for each point of tall buildings core with open cross-section stiffened by floor slabs at each floor level due to the horizontal force effect.

The illustrated experimental testing results argue in favour of certain possibility of the experimental model development that contains additional constructive elements able to significantly impact the horizontal deflection of the core. These are, for example, the lintel beams. The experimental analysis of this model described in this paper offers the possibility of determining the quantitative and qualitative influence of lintel beams and floor slabs [10] on the horizontal deflection of the core. The results of this research lend a better insight in the behaviour of tall buildings containing the central core as the most important carrying element holding the horizontal impact. This will lead to designers achieving more reliable and economic planning in such structures.

ACKNOWLEDGEMENT

The present work has been supported by The Ministry of Education and Science of the Republic of Serbia (Project No. ON174027)

REFERENCES

- [1] Ambrosini, D.: On free vibration of nonsymmetrical thin-walled beams. *Thin-Walled Structures.*, 2009., vol. 47, p.p. 629-636.
- [2] Ambrosini, D.: Experimental validation of free vibrations from nonsymmetrical thin-walled beams. *Engineering Structures.*, 2010., vol. 32, p.p. 1324-1332.
- [3] Wu, M., Qian, J., Fang, X., Yan, W.: Experimental and analytical studies on tall buildings with high level transfer story. *Struct. Design. Tall Spec. Build.*, 2007., vol. 16, p.p. 301-319.
- [4] Zalka, K.A.: Maximum deflection of symmetric wall-frame buildings. *Period. Polytech. Civil Eng.*, 2013., vol.57(2), p.p. 173-184.
- [5] Zalka, K.A.: Maximum deflection of assymmetric wall-frame buildings under horizontal load. *Period. Polytech. Civil Eng.*, 2014., vol. 58(4), p.p. 387-396.
- [6] Varjú, Gy, Prokić, A.: The Influence of Lintel Beams and Floor Slabs on Natural Frequencies of the Tall Buildings Core - Numerical and Experimental Studies. *Periodica Polytechnica Civil Engineering*, 2015., 59(4), p.p. 511-520.
- [7] Varju, Đ., Prokić, A.: Eksperimentalno određivanje sopstvenih frekvencija modela od pleksiglasa., Zbornik radova međunarodne konferencije "Savremena dostignuća u građevinarstvu 2016", Građevinski fakultet Subotica Univerzitet u Novom Sadu, 2016., p.p. 211-219.

- [8] Varju, Đ., Prokić, A., Bešević, M.: Eksperimentalno određivanje pomeranja na pleksiglas modelu., Zbornik radova međunarodne konferencije "Savremena dostignuća u građevinarstvu 2018", Građevinski fakultet Subotica Univerzitet u Novom Sadu, 2016., p.p. 217-224.
- [9] Živković, S., Čeh, A., Kukaras, D.: Eksperimentalno ispitivanje nosivosti AB greda sa mikroarmaturom bez uzengija, Zbornik radova međunarodne konferencije "Savremena dostignuća u građevinarstvu 2015", Građevinski fakultet Subotica Univerzitet u Novom Sadu, 2015., p.p. 293-300
- [10] Kekanović, M., Šumarac, D. , Gligović, D., Ćorić, S., Kljajić, Z.: Problems of the Design and Construction of Slab Between Floors, *Technical Gazette*, 2014. vol. 21(3), p.p. 631-638

ЕКСПЕРИМЕНТАЛНА АНАЛИЗА ПОМЕРАЊА ЈЕЗГРА ВИСОКИХ ЗГРАДА - УКРУЋЕНА МЕЋУСПРАТНИМ ПЛОЧАМА - ПОМОЋУ ПЛЕКСИГЛАС МОДЕЛА

Резиме: У раду је приказан поступак за експериментално одређивање хоризонталног померања тачке модела израђеног од плексигласа услед дејства хоризонталне силе. Геометрија модела је сразмерна геометрији нумеричког примера који је узет у радовима многих аутора за анализу језгра високих зграда. Ово испитивање нуди могућност експерименталне анализе армирано-бетонског језгра - укрућеног међуспратним плочама на нивоима спратова - на утицаје хоризонталног оптерећења од сеизмичких сила и дејства ветра. Резултати су упоређени са резултатима добијеним помоћу МКЕ и показују значајно слагање.

Кључне речи: експериментални модел, језгро високих зграда, танкозидни носачи, торзија